


MACHINE INFORMATION

- Precise height control of Slot Die using displacement sensor and stepping motor
- Real-time tension control with load cell feedback
- Dryer option by customer's request. (Hot Air Dryer, IR Heater, UV Curing)
- Pump option at customer's request (Syringe Pump, Gear Pump, Mono Pump)

MINI R2R SYSTEM

SCHEMATIC DRAWING

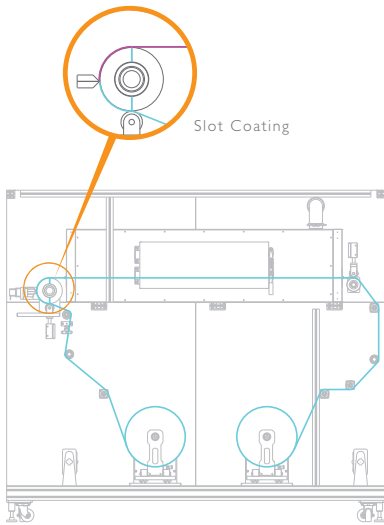

SPECIFICATIONS

Unit : mm

MODEL	MACHINE SIZE	MACHINE SPEED	SLOT DIE COATING WIDTH	WEB TENSION	CURING	METERING PUMP	ETC
MRSC 150	2200 X 1400 X 1950(H)	0.1 ~ 5 M/min	Max. 140mm	Max. 30kg.f	UV LED (*Option) Hot Air Dryer (*Option) IR Heater (*Option)	Syringe Pump (*Option) Gear Pump (*Option) Mono Pump (*Option)	Corona (*Option) Web Cleaner (*Option) Laminator (*Option)
MRSC 300	2200 X 1600 X 1950(H)		Max. 290mm				

DETAILS

