


**MACHINE INFORMATION**

- Various kinds of application in film such as PET film, PC film and TAC Film, etc with perfect precision tension control
- High accurate alignment with applying ultrasonic sensor and actuator
- Slotdie Coating to make uniform one solution
- Precise height control of gap roll using displacement sensor and stepping motor

# UV IMPRINTING R2R SYSTEM

**SCHEMATIC DRAWING**

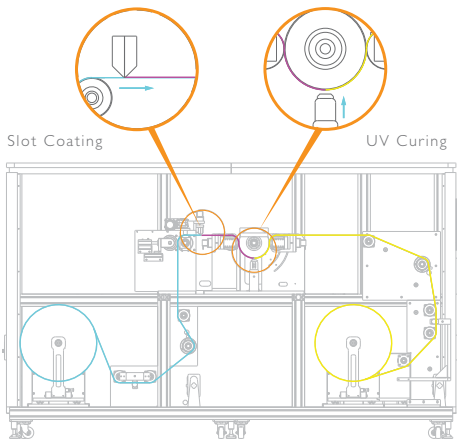

**SPECIFICATIONS**

Unit : mm

| MODEL    | MACHINE SIZE          | MACHINE SPEED | COATING WIDTH | WEB TENSION | CURING   | METERING PUMP  |
|----------|-----------------------|---------------|---------------|-------------|--|--|
| URIS 300 | 2200 X 1400 X 1800(H) | 0.1 ~ 5 M/min | Max. 290mm    | Max. 30kg.f | UV LED (*Option)<br>Hot Air Dryer (*Option)<br>IR Heater (*Option) | Syringe Pump (*Option)<br>Gear Pump (*Option)<br>Mono Pump (*Option) |
| URIS 600 | 2800 X 1700 X 1800(H) |               | Max. 590mm    |             |  |  |

**DETAILS**

